# Roulement conique
# J6392-J6327-TIMKEN - J6392-J6327-TIMKEN

https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/j6392-j6327-timken

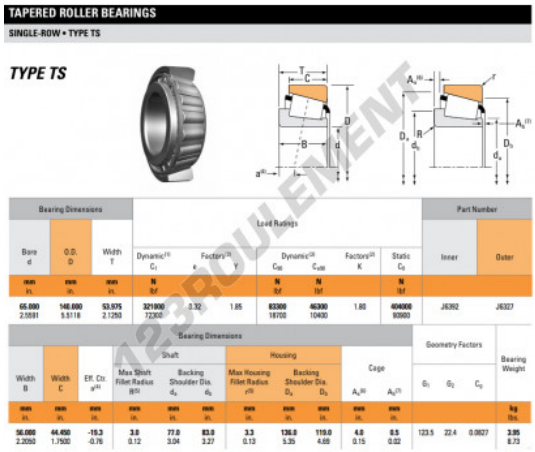

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|---|---|---|---|---|---|---|---|---|---|---|
| Bore d | O.D. D | Width T | Dynamic[1] $C_1$ | Factors[1] e | Y | Dynamic[2] $C_{90}$ | $C_{u90}$ | Factors[2] K | Static $C_0$ | Inner | Outer |
| mm in. | mm in. | mm in. | N lbf | | | N lbf | N lbf | | N lbf | | |
| 65.000 2.5591 | 140.000 5.5118 | 53.975 2.1250 | 321000 72300 | 0.32 | 1.85 | 83300 18700 | 46300 10400 | 1.80 | 404000 90900 | J6392 | J6327 |

| Bearing Dimensions | | | Shaft | | | Housing | | | Cage | | Geometry Factors | | | Bearing Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Width B | Width C | Eff. Ctr. a[4] | Max Shaft Fillet Radius $r_{as}$[5] | Backing Shoulder Dia. $d_b$ | $d_b$ | Max Housing Fillet Radius $r_{bs}$[5] | Backing Shoulder Dia. $D_b$ | $D_b$ | $A_w$[6] | $A_b$[7] | $G_1$ | $G_2$ | $C_y$ | |
| mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | | | | kg lbs. |
| 56.000 2.2050 | 44.450 1.7500 | -19.3 -0.76 | 3.0 0.12 | 77.0 3.04 | 83.0 3.27 | 3.3 0.13 | 136.0 5.35 | 119.0 4.69 | 4.0 0.15 | 0.5 0.02 | 123.5 | 22.4 | 0.0827 | 3.95 8.73 |

## CARACTÉRISTIQUES PRODUIT

| | |
|---|---|
| Marque | TIMKEN |
| N° Ean13 | 3663952319704 |
| Diam. intérieur | 65 mm |
| Diam. extérieur | 140 mm |
| Epaisseur | 53.975 mm |
| Conditionnement | 1 |

contact@123roulement.ca
+33 359 360 490
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE