# Roulement conique
# LL957049-LL957010-TIMKEN - LL957049-LL957010-TIMKEN

https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/ll957049-ll957010-timken

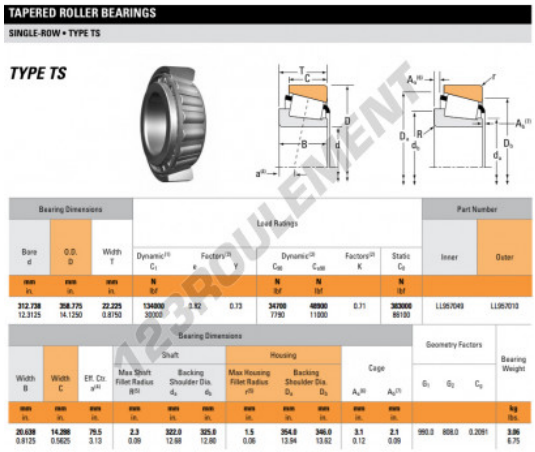

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

| Bearing Dimensions | | | Load Ratings | | | | | | Part Number | |
|---|---|---|---|---|---|---|---|---|---|---|
| Bore d | O.D. D | Width T | Dynamic[1] $C_1$ | Factors[1] e | Factors[1] Y | Dynamic[2] $C_{90}$ | Dynamic[2] $C_{u90}$ | Factors[2] K | Static $C_0$ | Inner | Outer |
| mm in. | mm in. | mm in. | N lbf | | | N lbf | N lbf | | N lbf | | |
| 312.738 12.3125 | 358.775 14.1250 | 22.225 0.8750 | 134000 30000 | 0.42 | 0.73 | 34700 7790 | 48900 11000 | 0.71 | 383000 86100 | LL957049 | LL957010 |

| Bearing Dimensions | | | | | | | | | | | Geometry Factors | | | Bearing Weight |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | Shaft | | | Housing | | | Cage | | | | | |
| Width B | Width C | Eff. Ctr $a^{(4)}$ | Max Shaft Fillet Radius $ra^{(5)}$ | Backing Shoulder Dia. $d_a$ | $d_b$ | Max Housing Fillet Radius $rb^{(5)}$ | Backing Shoulder Dia. $D_a$ | $D_b$ | $A_w^{(6)}$ | $A_b^{(7)}$ | $G_1$ | $G_2$ | $C_p$ | |
| mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | mm in. | | | | kg lbs. |
| 20.638 0.8125 | 14.288 0.5625 | 79.5 3.13 | 2.3 0.09 | 322.0 12.68 | 325.0 12.80 | 1.5 0.06 | 354.0 13.94 | 346.0 13.62 | 3.1 0.12 | 2.1 0.09 | 980.0 | 808.0 | 0.2091 | 3.06 6.75 |

123ROULEMENT

## CARACTÉRISTIQUES PRODUIT

| | |
|---|---|
| Marque | TIMKEN |
| N° Ean13 | 3663952329406 |
| Diam. intérieur | 312.738 mm |
| Diam. extérieur | 358.775 mm |
| Epaisseur | 22.225 mm |
| Conditionnement | 1 |

contact@123roulement.ca
+33 359 360 490
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE