


Roulement conique 42375-42587-B-TIMKEN - 42375-42587-B-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/42375-42587-b-timken>

TAPERED ROLLER BEARINGS

TYPE TSF

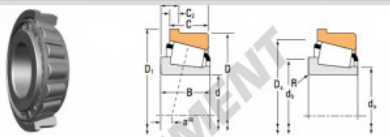

| Bearing Dimensions | | | | | | Load Ratings | | | | | | Part Number | |
|--------------------|-----------|------------|--|-----------------------------|------|---|-----------------------------|--------------------------|-------|---------|--|-------------|--|
| Bore d | O.D. D | Width B | Dynamic ⁽¹⁾ C ₁ | Factors ⁽¹⁾ e | Y | Dynamic ⁽²⁾ C ₀₂ | Factors ⁽²⁾ K | Static C ₀ | Inner | Outer | | | |
| mm | mm | mm | N | | | N | | N | | | | | |
| 95.250 | 149.225 | 28.971 | 123000 | 0.12 | 1.22 | 30100 | 42200 | 241000 | 42375 | 42587-B | | | |
| 3.750 | 5.9750 | 0.5000 | 43000 | 0.16 | | 11300 | 9400 | 94000 | | | | | |

| Bearing Dimensions | | | | | | | | | | Geometry Factors | | | Bearing Weight | |
|--------------------|------------|-----------------------------|--|-----------------------------------|--|--|--|----------------|----------------|------------------|--------|--|----------------|------|
| Width B | Width C | Eff. Dia. d ₁ | Outer Ring Ridge O.D. D ₁ | Flange Width C ₁ | Max Shaft Fillet Radius R _f | Sealing Shoulder Dia. d ₂ | Sealing Shoulder Dia. D ₂ | G ₁ | G ₂ | C ₂ | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | | | | | | kg | |
| 28.971 | 28.968 | 3.0 | 154.681 | 5.338 | 3.0 | 102.0 | 108.0 | 152.0 | 126.7 | 37.2 | 0.1268 | | | 1.96 |
| 1.1408 | 0.9388 | 0.12 | 6.0358 | 0.2188 | 0.12 | 4.00 | 4.25 | 5.98 | | | | | 4.28 | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952339559 |
| Diam. intérieur | 95.25 mm |
| Diam. extérieur | 149.225 mm |
| Épaisseur | 28.971 mm |
| Conditionnement | 1 |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE