


Roulement conique

NA26118SW-26284D-TIMKEN - NA26118SW-26284D-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/na26118sw-26284d-timken>

TAPERED ROLLER BEARINGS
DOUBLE-ROW • TYPE TNASW

TYPE TNASW

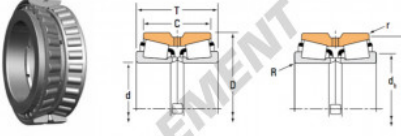

| Bearing Dimensions | | | | Load Ratings | | | | | | | |
|--------------------|--------|---------|---------------------------|-------------------------|------|-------------------------------------|----------------|----------------|-------------------------|-----------------|------------------------|
| Bore d | O.D. D | Width T | Double Outer Ring Width C | Dynamic C ₁₀ | e | Factor ¹⁾ Y ₁ | Y ₂ | C ₀ | Dynamic C ₉₀ | C ₀₀ | Factor ²⁾ K |
| mm | mm | mm | mm | N | mm | | | N | N | N | |
| in. | in. | in. | in. | lb | | | | lb | lb | lb | |
| 29.987 | 71.973 | 42.260 | 36.512 | 12100 | 0.36 | 1.87 | 2.79 | 18100 | 11500 | 31400 | 1.62 |
| 1.180 | 2.833 | 1.680 | 1.437 | 2730 | | | | 400 | 250 | 700 | |

| Part Number | Dimensions | | | | | | Bearing Weight |
|------------------|------------|-------|--|--------------------------------------|--|--------------------------------------|----------------|
| | Inner | Outer | Shaft | | Housing | | |
| | | | Max Shaft Fillet Radius R _F | Backing Shoulder Dia. d _s | Max Housing Fillet Radius r _H | Backing Shoulder Dia. D _s | kg |
| | | | mm | mm | mm | mm | lbs |
| | | | in. | in. | in. | in. | oz. |
| NA26118SW 26284D | | | 1.5 | 26.0 | 0.8 | 65.0 | 6.84 |
| | | | 0.06 | 1.02 | 0.03 | 2.56 | 1.96 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952374628 |
| Diam. intérieur | 29.987 mm |
| Diam. extérieur | 71.973 mm |
| Épaisseur | 42.76 mm |
| Conditionnement | 1 |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE