


## Roulement à aiguilles GBR1223520-UU-IKO - GBR1223520-UU-IKO

<https://www.123roulement.ca/roulement-palier/roulement-aiguilles/aiguilles/gbr1223520-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

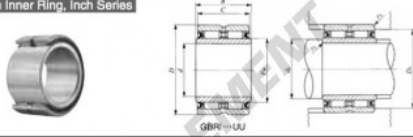

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
<b>34.925</b> (1 3/8)	<b>GBR1 223520 UU</b>		311	34.925 (1.375)	55.562 (2.187)	31.750 (1.250)			
B	F <sub>w</sub>	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
32.000	41.275 (1.625)	40.2	40.2	50.5	0.6	56 600	105 000	1 900	LRBZ 222620

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383439
Diam. intérieur	34.925 mm
Diam. extérieur	55.562 mm
Épaisseur	31.75 mm
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE