


## Roulement à aiguilles GBR1527632-U-IKO - GBR1527632-U-IKO

<https://www.123roulement.ca/roulement-palier/roulement-aiguilles/aiguilles/gbri527632-u-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

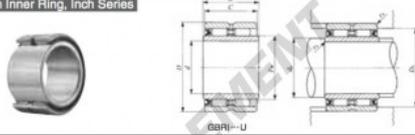

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)					
	With two seals	With one seal		d	D	C			
<b>82.550</b> (3 1/4)	<b>GBR1 527632 U</b>		2 010	82.550 (3 1/4)	120.650 (4 7/8)	50.800 (2)			
B	F <sub>w</sub>	Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min. d <sub>s</sub>	Max. d <sub>s</sub>	D <sub>s</sub> Max.					r <sub>as</sub> max. <sup>(1)</sup>
51.050	95.250 (3 3/4)	91	93	112.6	1.5	175 000	371 000	850	LRBZ 526032

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952383620
Diam. intérieur	82.55 mm
Diam. extérieur	120.65 mm
Épaisseur	50.8 mm
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE