


# Rotule GE

## SBB96-2RS-IKO - SBB96-2RS-IKO

<https://www.123roulement.ca/roulement-palier/rotule/ge/sbb96-2rs-iko>

**IKO**  
**SPHERICAL BUSHINGS**  
Steel-on-steel Spherical Bushings Inch Series

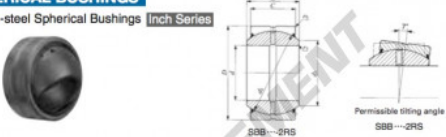

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
152.400 (6)		<b>SBB 96-2RS</b>	17.6	152.400 (6)	222.250 (8 7/8)	120.65(4.750)	104.78(4.125)
Radial internal clearance mm	Mounting dimensions mm		Dynamic load capacity C <sub>d</sub> N	Static load capacity C <sub>s</sub> N			
	d <sub>k</sub>	d <sub>j</sub>		r <sub>1</sub> max. Min.	r <sub>2</sub> max. Min.	N	
207(8.150)	0.13 / 0.23	167.5	0.8	1.1	2 130 000	12 800 000	

Notes:  
(1) Minimum allowable value of chamfer dimensions r<sub>1</sub> and r<sub>2</sub>.  
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d<sub>k</sub>.  
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.  
2. Not provided with prepacked grease. Perform proper lubrication for use.

## CARACTÉRISTIQUES PRODUIT

Marque	IKO
N° Ean13	3663952393117
Diam. intérieur	152.4 mm
Diam. extérieur	222.25 mm
Épaisseur	120.65 mm
Type	GE
Lubrification	sans
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE