


Galet de came avec axe CF10-VRM-IKO - CF10-VRM-IKO

<https://www.123roulement.ca/roulement-palier/roulement-bille/galet-came-axe/cf10-vrm-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Screwdriver Slot

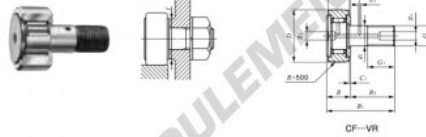

| Stud dia. mm | Identification number | | | | | | | | Mass (Ref.) | | | | | |
|------------------------|-------------------------|------------------|-----------------------------|----------------|-------------------------|----------------|-----------------------------|----------------|--------------------------------|---------------------------|---|---|--|-------|
| | Shield type | | | | Sealed type | | | | g | D | C | d ₁ | | |
| | With crowned outer ring | | With cylindrical outer ring | | With crowned outer ring | | With cylindrical outer ring | | | | | | | |
| 10 | CF 10 | VRM | | | | | | | 46 | 22 | 12 | 10 | | |
| Boundary dimensions mm | | | | | | | | | | | | | | |
| G | G ₁ | B _{max} | B _{1max} | B ₂ | B ₃ | C ₁ | g ₁ | g ₂ | f ⁽¹⁾ Min. mm | Mounting torque N·m | Basic dynamic load rating C N | Basic static load rating C ₀ N | Maximum allowable static load N | |
| M10×1 | 12 | 13.2 | 36.2 | 23 | — | 0.6 | *4 | — | 0.3 | 16 | 14.7 | 9 570 | 14 500 | 8 650 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3663952440248 |
| Diam. intérieur | 10 mm |
| Diam. extérieur | 22 mm |
| Épaisseur | 12 mm |
| Conditionnement | 1 |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE