


Rotule SI

BEF25-60-501-DURBAL - BEF25-60-501-DURBAL

<https://www.123roulement.ca/roulement-palier/rotule/si/bef25-60-501-durbal>

BEF25-60-501

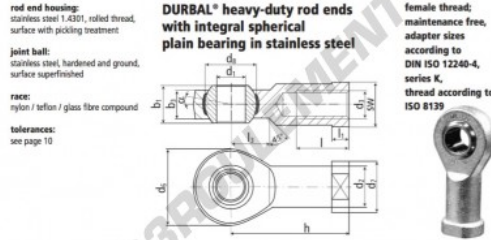

| order number | | measurements [mm] | | | | | | | | | | | |
|--------------|-------------------|-------------------|----------------|----------------|--------------------|--------------------|----------------|----------------|----------------|----------------|-------|-------------------|--|
| type | right hand thread | left hand thread | d ₁ | d ₂ | d ₃ | d ₆ | d ₇ | d ₈ | b ₁ | b ₃ | | | |
| BEF 25 | -60 | -501 | 25 | 33,5 | M 24 x 2 | 60 | 42 | 42,80 | 31 | 22,0 | | | |
| type | | measurements [mm] | | | | | | | | weight | | basic load rating | |
| h | l | l ₁ | l ₃ | SW | α ₁ [°] | α ₂ [°] | β [°] | C | C ₀ | dyn. | stat. | | |
| BEF 25 | 94 | 42 | 12,0 | 30 | 36 | 15,0 | 10,0 | 0,705 | 27860 | 79100 | | | |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|-------------------|
| Marque | DURBAL |
| N° Ean13 | 3663952509600 |
| Diam. intérieur | 25 mm |
| Diam. extérieur | 60 mm |
| Epaisseur | 31 mm |
| Type | SI |
| Poids | 705 g |
| Filetage | Filetage à droite |
| Lubrification | sans |
| Conditionnement | 1 |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE