


## Roulement conique 476-472-TIMKEN - 476-472-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/476-472-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

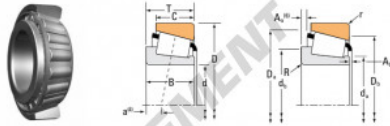

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> e	Dynamic <sup>3)</sup> C <sub>2</sub>	Factor <sup>4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
60 000	120 000	29.794	142000	2.30	32200	24500	1.52	180000	418 412	
2.3622	4.7244	1.1730	32000		6900	1900		418000		

Bearing Dimensions										Geometry Factors			Bearing Weight
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>	
Width B	Width C	ER. Dr. α <sup>1)</sup>	Max Shaft Fillet Radius R <sup>2)</sup>	Backing Shoulder Dia. d <sub>4</sub>	Max Housing Fillet Radius r <sup>3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	Shoulder Dia. D <sub>2</sub>	A <sub>1</sub> <sup>4)</sup>	A <sub>2</sub> <sup>5)</sup>				A <sub>3</sub> <sup>6)</sup>
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
29.087	24.237	-4.1	2.8	69.8	23.8	2.8	114.8	197.8	1.5	2.2			
1.1420	0.9542	-0.16	0.08	2.72	2.87	0.08	4.49	4.21	0.05	0.09			

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952318530
Diam. intérieur	60 mm
Diam. extérieur	120 mm
Épaisseur	29.794 mm
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE