


## Roulement conique 32032X-TIMKEN - 32032X-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/32032x-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • IsoClass

**IsoClass**

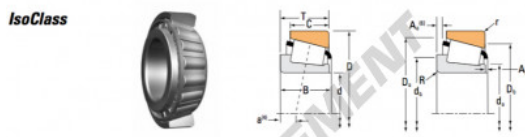

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(1)</sup> Y	Dynamic <sup>(2)</sup> C <sub>0</sub>	Factor <sup>(2)</sup> K	Static C <sub>0</sub>	Assembly Inner/Outer		
mm	mm	mm	N		N		N			
160.000	240.000	51.000	480000	0.14	1.20	120000	17000	1.27	803000	32032X
6.3002	9.4488	2.0079	108000		28000		182000			

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					Cage				
Width B	Width C	ER Co. a <sup>(1)</sup>	Max Shift Flat Radius R <sup>(1)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max Housing Flat Radius r <sup>(1)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Backing Shoulder Dia. D <sub>s</sub>	A <sub>1</sub> <sup>(1)</sup>	A <sub>2</sub> <sup>(1)</sup>	G <sub>1</sub>	G <sub>2</sub>	C <sub>2</sub>	kg	
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
160.000	240.000	1.8	3.0	176.0	181.0	2.5	204.0	207.0	3.5	4.1	501.7	103.0	0.1166	7.85
2.0079	1.4907	0.07	0.12	6.89	7.13	0.10	8.21	8.70	0.13	0.16			12.21	

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952354071
Diam. intérieur	160 mm
Diam. extérieur	240 mm
Épaisseur	51 mm
Poids	7750 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE