


## Roulement conique 375-372-TIMKEN - 375-372-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/375-372-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

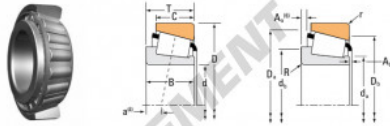

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(3)</sup> C <sub>02</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
52.000	100.000	24.000	104000	1.34	23000	1.33	101000	375	312	
0.0010	0.0010	0.0042	23400		6070		22700			

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. a <sup>(1)</sup>	Max. Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max. Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	A <sub>3</sub> <sup>(6)</sup>					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm					
22.225	21.824	-3.8	2.3	57.8	88.8	2.8	90.8	88.8	8.8	1.5	37.5	15.4	0.0018	0.85
0.8750	0.8592	-0.15	0.09	2.24	3.38	0.08	3.54	3.38	0.35	0.06				1.88

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952316093
Diam. intérieur	50.8 mm
Diam. extérieur	100 mm
Épaisseur	25 mm
Poids	850 g
Conditionnement	1
Norme	Sans norme

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE