


## Roulement conique 595-592XS-TIMKEN - 595-592XS-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/595-592xs-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

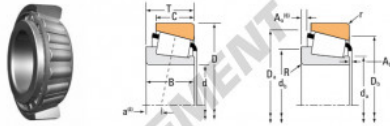

Bearing Dimensions			Load Ratings						Part Number	
Bore d	O.D. D	Width T	Dynamic <sup>(1)</sup> C <sub>1</sub>	Factor <sup>(2)</sup> K	Dynamic <sup>(3)</sup> C <sub>02</sub>	Factor <sup>(4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N		N		N			
82.550	147.638	35.717	21600	1.34	5000	4200	1.32	31900	506	592XS
3.250	5.8125	1.4062	4800		1300	930		7100		

Bearing Dimensions										Geometry Factors			Bearing Weight	
Shaft					Housing					G <sub>1</sub>	G <sub>2</sub>	C <sub>3</sub>		
Width B	Width C	ER. Dr. α <sup>(1)</sup>	Max Shaft Fillet Radius R <sup>(2)</sup>	Backing Shoulder Dia. d <sub>1</sub>	Max Housing Fillet Radius r <sup>(3)</sup>	Backing Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>(4)</sup>	A <sub>2</sub> <sup>(5)</sup>	A <sub>3</sub> <sup>(6)</sup>					
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg				
36.322	26.192	-3.5	3.5	53.0	100.0	3.3	142.0	138.0	4.1	1.3	151.4	38.3	0.1418	2.85
1.4300	1.0312	-0.10	0.14	2.08	3.94	0.13	5.59	5.24	0.16	0.07				5.84

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952322421
Diam. intérieur	82.55 mm
Diam. extérieur	147.638 mm
Épaisseur	35.717 mm
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE