


## Roulement conique 67786-67720-TIMKEN - 67786-67720-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/67786-67720-timken>

**TAPERED ROLLER BEARINGS**  
SINGLE-ROW • TYPE TS

**TYPE TS**

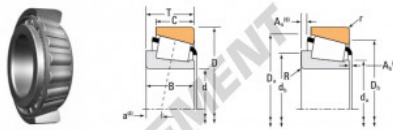

Bearing Dimensions				Load Ratings					Part Number		
Bore d	O.D. D	Width B		Dynamic <sup>1)</sup> C <sub>1</sub>	Factor <sup>2)</sup> e	Dynamic <sup>3)</sup> C <sub>02</sub>	Factor <sup>4)</sup> K	Static C <sub>0</sub>	Inner	Outer	
mm	mm	mm	N	N		N	N	N			
in	in	in	lbf	lbf		lbf	lbf	lbf			
174.625	247.650	47.625	40000	1.41	1.38	10000	2900	1.33	77000	67786	67720
6.8750	9.7500	1.8750	9110			2300	1300		17500		

Bearing Dimensions										Geometry Factors			Bearing Weight			
Shaft					Housing					Cage	G <sub>1</sub>	G <sub>2</sub>		C <sub>3</sub>		
Width B	Width C	ER. Dr. a <sup>1)</sup>	Min. Shaft Fillet Radius R <sup>2)</sup>	Backing Shoulder Dia. d <sub>s</sub>	Max. Housing Fillet Radius r <sup>3)</sup>	Backing Shoulder Dia. D <sub>s</sub>	Shoulder Dia. D <sub>1</sub>	A <sub>1</sub> <sup>4)</sup>	A <sub>2</sub> <sup>5)</sup>				mm		mm	mm
in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	in	kg
47.625	38.100	4.8	0.8	185.0	200.0	3.3	240.0	220.0	4.8	1.8	622.3	122.0	0.1214	6.87	15.37	
1.8750	1.5000	0.19	0.31	7.28	7.87	0.13	9.45	8.62	0.19	0.07						

### CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952326412
Diam. intérieur	174.625 mm
Diam. intérieur	6 7/8" inch
Diam. extérieur	247.65 mm
Diam. extérieur	9 3/4" inch
Epaisseur	47.625 mm
Epaisseur	1 7/8" inch
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE