Roulement conique
LL469949-LL469910-TIMKEN - LL469949-LL469910-TIMKEN

https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/ll469949-ll469910-timken

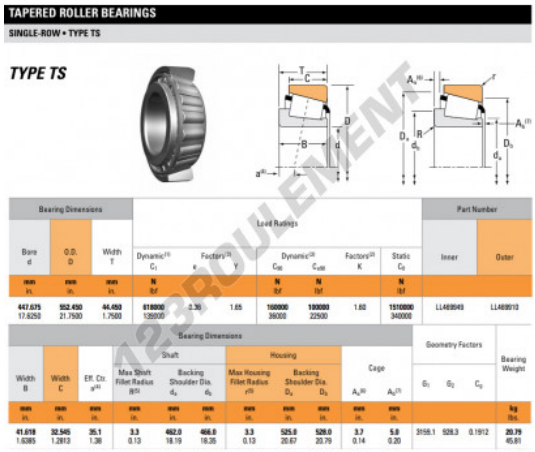

TAPERED ROLLER BEARINGS

SINGLE-ROW • TYPE TS

TYPE TS

Bearing Dimensions														Part Number	
Bore d	O.D. D	Width T	Load Ratings: Dynamic[1] C_1	Factors[1] e	Factors[1] Y	Dynamic[2] C_{90}	Dynamic[2] C_{u90}	Factors[2] K	Static C_0					Inner	Outer
mm / in.	mm / in.	mm / in.	N / lbf			N / lbf	N / lbf		N / lbf						
447.675 / 17.6250	552.450 / 21.7500	44.450 / 1.7500	618000 / 139000	0.30	1.65	160000 / 36000	100000 / 22500	1.62	1510000 / 340000					LL469949	LL469910

Bearing Dimensions												Geometry Factors			Bearing Weight
			Shaft			Housing				Cage					
Width B	Width C	Eff. Ctr. $a^{[4]}$	Max Shaft Fillet Radius $ra^{[5]}$	Backing Shoulder Dia. d_b	d_b	Max Housing Fillet Radius $rB^{[5]}$	Backing Shoulder Dia. D_b	D_b	A_w[6]	A_b[7]	G_1	G_2	C_y		
mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.	mm / in.					kg / lbs.
41.618 / 1.6385	32.545 / 1.2813	35.1 / 1.38	3.3 / 0.13	462.0 / 18.19	466.0 / 18.35	3.3 / 0.13	525.0 / 20.67	528.0 / 20.79	3.7 / 0.14	5.0 / 0.20	3158.1	528.3	0.1912		20.79 / 45.81

123ROULEMENT

CARACTÉRISTIQUES PRODUIT

Marque	TIMKEN
N° Ean13	3663952330525
Diam. intérieur	447.675 mm
Diam. extérieur	552.45 mm
Epaisseur	44.45 mm
Conditionnement	1

contact@123roulement.ca
+33 359 360 490
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE