


Galet de came avec axe CFE12-1-VBUU-IKO - CFE12-1-VBUU-IKO

<https://www.123roulement.ca/roulement-palier/roulement-bille/galet-came-axe/cfe12-1-vbuu-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

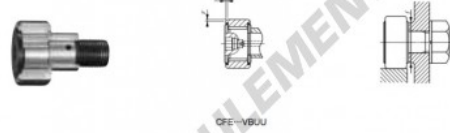

| Outside diameter of eccentric roller mm | Identification number | | | | Mass (Ref.) | | | | | | | | | |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|----------------|----|------------------|------------------|--------------------------|--------------------------------|--------------------------------|-------------------------------|------------------------------------|--------|
| | Shield type | | Sealed type | | g | D | C | d _e | | | | | | |
| 16 | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring | 117 | 32 | 14 | 16 | | | | | | |
| CFE 12-1 VBUU | | | | | | | | | | | | | | |
| Boundary dimensions, mm | | | | | | | | | | | | | | |
| G | B ₃ | B ₁ max | B ₂ max | C ₁ | G ₁ | H | f _{max} | f _{min} | Mounting dimension mm | Maximum splining torque N·m | Basic dynamic load rating N | Basic static load rating N | Maximum allowable static load N | |
| M12×1.5 | 11.5 | 15.2 | 40.2 | 25 | 0.6 | 6 | 13.5 | 6 | 0.6/0.8 | 21 | 21.9 | 13 500 | 19 700 | 13 200 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | IKO |
| N° Ean13 | 3616060460493 |
| Diam. intérieur | 16 mm |
| Diam. extérieur | 32 mm |
| Épaisseur | 14 mm |
| Poids | 117 g |
| Conditionnement | 1 |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE