

Rotule TAPR GIHN-K-32LO-DURBAL - GIHN-K-32LO-DURBAL


<https://www.123roulement.ca/roulement-palier/rotule/tapr/gihn-k-32lo-durbal>

GIHN-K-32LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

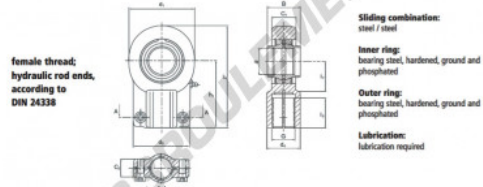

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel
Inner ring:
bearing steel, hardened, ground and phosphated
Outer ring:
bearing steel, hardened, ground and phosphated
Lubrication:
lubrication required

order number	d	d ₁	measurement [mm]	G	d ₂	B	C ₁	C ₂
GIHN-K 32 LO	32	71	M 27 x 2	38,0	66	32	28	22

type	l ₁ min	measurement [mm]	l ₁	load rating	weight
GIHN-K / GIHN-KL 32 LO	37	h ₁	118,5	C ₀ [kN]	[kg]
			32	114,0	1,20

CARACTÉRISTIQUES PRODUIT

Marque	DURBAL
N° Ean13	3663952500188
Diam. intérieur	32 mm
Diam. intérieur	1.26" inch
Diam. extérieur	71 mm
Diam. extérieur	2.795" inch
Epaisseur	28 mm
Epaisseur	1.102" inch
Type	TAPR
Poids	1200 g
Filetage	Filetage à droite
Lubrification	avec
Conditionnement	1

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE