


Roulement à rouleaux NNU4932-JTEKT - NNU4932-JTEKT

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/rouleaux/nnu4932-jtekt>

Double-row cylindrical roller bearings 

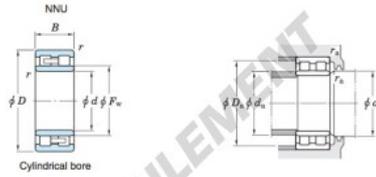

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min ⁻¹)		Bearing No. NN	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F_w</i>	<i>C₁₀</i>	<i>C₉₀</i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
160	220	60	2	178.5	—	340	695	2 500	3 000	

Mounting dimensions (mm)		Mounting dimensions (mm)				(Refer.) Mass (kg)			
NUU Cylindrical bore	NUU Tapered bore	<i>d_a</i> min.	<i>d_a</i> max.	<i>d_b</i> min.	<i>d_b</i> max.	<i>D_s</i> min.	<i>r_s</i> max.	Cylindrical bore	Tapered bore
		169	176	182	211	—	2	6.95	6.65

CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	4549250031519
Diam. intérieur	160 mm
Diam. intérieur	6.299" inch
Diam. extérieur	220 mm
Diam. extérieur	8.661" inch
Epaisseur	60 mm
Epaisseur	2.362" inch
Poids	6950 g
Conditionnement	1

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE