


## Roulement à rouleaux NN3020K-JTEKT - NN3020K-JTEKT

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/rouleaux/nn3020k-jtekt>

Double-row cylindrical roller bearings ————— Koyo

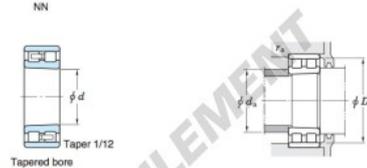

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
d	D	B	r min.	F <sub>02</sub>	C <sub>10</sub>	C <sub>02</sub>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
100	150	37	1.5	137	157	265	3 900	4 700	NN3020K	NN3020K

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Refer. Mass (kg)	
d <sub>a</sub> min.	d <sub>a</sub> max.	D <sub>a</sub> min.	D <sub>a</sub> max.	r <sub>a</sub> min.	r <sub>a</sub> max.	Cylindrical bore	Tapered bore
108	—	142	139	1.5	—	2.28	2.21

### CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952473857
Diam. intérieur	100 mm
Diam. intérieur	3.937" inch
Diam. extérieur	150 mm
Diam. extérieur	5.906" inch
Epaisseur	37 mm
Epaisseur	1.457" inch
Poids	2210 g
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE