


## Roulement à rouleaux NN3060K-JTEKT - NN3060K-JTEKT

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/rouleaux/nn3060k-jtekt>

### Double-row cylindrical roller bearings Koyo

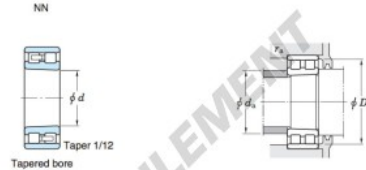

Boundary dimensions (mm)				Basic load ratings (kN)			Limiting speeds (min <sup>-1</sup> )		Bearing No.	
<i>d</i>	<i>D</i>	<i>B</i>	<i>r</i> min.	<i>F<sub>w</sub></i>	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.	Cylindrical bore	Tapered bore
300	460	118	4	—	418	1 290	2 460	1 100	1 300	<b>NN3060K</b>

Mounting dimensions (mm)		Cylindrical bore		Tapered bore		Refer. Mass (kg)	
<i>d<sub>a</sub></i>	<i>D<sub>a</sub></i>	min.	max.	min.	max.	Cylindrical bore	Tapered bore
316	421	—	—	444	421	70.8	68.7

## CARACTÉRISTIQUES PRODUIT

Marque	JTEKT
N° Ean13	3663952474014
Diam. intérieur	300 mm
Diam. extérieur	460 mm
Épaisseur	118 mm
Poids	68700 g
Conditionnement	1

[contact@123roulement.ca](mailto:contact@123roulement.ca)

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE