


Roulement conique

17118S-17244-TIMKEN - 17118S-17244-TIMKEN

<https://www.123roulement.ca/roulement-palier/roulement-rouleaux/conique/17118s-17244-timken>

TAPERED ROLLER BEARINGS
SINGLE ROW • TYPE TS

TYPE TS

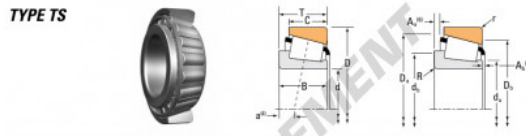

| Bearing Dimensions | | | | Load Ratings | | | | Part Number | | |
|--------------------|------------------|------------------|--------------|---------------------------------------|-------------------------|--|-------------------------|-----------------------|---------|-------|
| Bore d | O.D. D | Width B | | Dynamic ⁽¹⁾ C ₁ | Factor ⁽²⁾ K | Dynamic ⁽³⁾ C ₀₂ | Factor ⁽⁴⁾ K | Static C ₀ | Inner | Outer |
| mm | mm | mm | N | N | | N | N | N | | |
| 30.000 1.1811 | 62.000 2.4400 | 16.000 0.6300 | 4200 3120 | 1.30 | 1.57 | 1230 2530 | 2300 1050 | 1.57 9810 | 17118-S | 17244 |

| Bearing Dimensions | | | | | | | Geometry Factors | | Bearing Weight | | | | |
|--------------------|------------------|--------------------------|---|--------------------------------------|---|--------------------------------------|-------------------------------|-------------------------------|----------------|--------------|--------------|--------------|--------------|
| Width B | Width C | ER. Dr. α ⁽¹⁾ | Max. Shaft Fillet Radius R ⁽²⁾ | Backing Shoulder Dia. d _s | Max. Housing Fillet Radius r ⁽³⁾ | Backing Shoulder Dia. D _s | A ₁ ⁽⁴⁾ | A ₂ ⁽⁵⁾ | | | | | |
| mm | mm | mm | mm | mm | mm | mm | mm | mm | kg | | | | |
| 16.560 0.6522 | 14.200 0.5625 | -3.8 -0.14 | 1.5 0.06 | 34.5 1.36 | 37.0 1.46 | 1.5 0.06 | 57.0 2.24 | 54.0 2.12 | 8.2 0.01 | 11.0 0.00 | 11.0 0.00 | 11.0 0.00 | 0.24 0.54 |

CARACTÉRISTIQUES PRODUIT

| | |
|-----------------|---------------|
| Marque | TIMKEN |
| N° Ean13 | 3663952309101 |
| Diam. intérieur | 30 mm |
| Diam. extérieur | 62 mm |
| Épaisseur | 16 mm |
| Poids | 240 g |
| Conditionnement | 1 |
| Norme | Sans norme |

contact@123roulement.ca

+33 359 360 490

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE